


## Product Overview : Metal Flexible Conduit

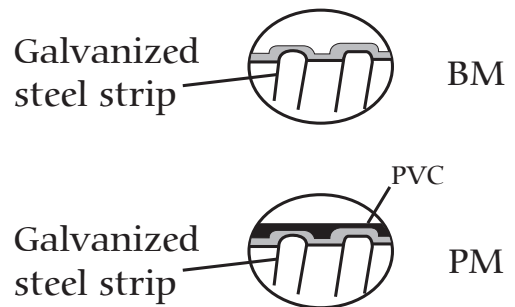

CE  IP68

<b>Product Type :</b>	Type BM bare metal hose and PM type plastic metal hose (stainless steel casing and preparation)
<b>Product Feature</b>	<ul style="list-style-type: none"> <li>• BM Flexible conduit is a general product of low cost. It's made of Galvanized iron sheet, designed in square buckle structure. The material makes this product with excellent flexible softness and can be widely used in the industry of construction, machinery and so on</li> <li>• PM flexible conduit uses BM conduit as tube core, coated by PVC material at the surface. Due to its light weight, softness, easy installation, strong connection to the equipment, water and oil resistant property, it's widely used in the field of Electric Powering, Chemical industry, metallurgy, and machinery.</li> </ul>
<b>Remark :</b>	<p>If you need <b>*Black Color*</b> Please Specify <b>*B*</b> at the end ** <b>PM6-9-B</b> **</p> <p>If you need <b>*Gray Color*</b> Please Specify <b>*G*</b> at the end ** <b>PM6-9-G</b> **</p>

## Technical Specifications

Unit:mm

Product Model	Specification		Min inner diameter (mm.)	Outer diameter (mm.)		Thickness	Packing Length /Roll (m.)
	Metrix	G		BM Without PVC	PM PVC Coated		
PM6-9	φ6	3/16"	5.9	8.3	9.3	0.20	200
PM8-11	φ8	1/4"	7.9	10.5	11.5	0.20	100
PM10-14	φ10	5/16"	9.9	12.8	13.8	0.20	100
PM12-16	φ12	3/8"	12.5	15.3	16.1	0.20	50
PM15-20	φ15	1/2"	14.7	18.0	19.0	0.20	50
PM20-25	φ20	3/4"	19.8	23.5	24.3	0.22	50
PM25-30	φ25	1"	24.8	28.5	29.3	0.24	50
PM32-38	φ32	1-1/4"	31.5	36.3	37.6	0.30	50
PM38-44	φ38	1-1/2"	37.5	43.0	44.2	0.35	50
PM51-60	φ51	2"	50.5	57.0	58.6	0.40	20
PM64-74	φ64	2-1/2"	63.5	71.5	74.0	0.55	20
PM75-85	φ75	3"	74.5	82.0	86.0	0.55	10
PM100-113	φ100	4"	99.0	110.0	113.0	0.55	10
PM125-135	φ125	5"	122.0	133.5	135.5	0.55	5
PM150-161	φ150	6"	146.0	158.5	161.5	0.35	5

PAGE 22