

SH-BDM-1: Industrial Cable Gland (Non-Armoured Cable)



Materials	Nickel Brass (Brass, Stainless Steel 304/316 - On Request)
Surface Treatment	Nickel Planted, Passivation
Sealing Materials	Silicon Rubber, Neoprene, Teflon, PA6
Explosion Mark	Exd IIC Gb/ Exe II Gb/ Ex tD A21 IP68
Fireproof Grade	V0 (UL94)
Protection Level	IP68 (Screwed-on the Cap)
Ambient Temperature	Static from -60°C to 100°C, up to 120°C Short Time. Dynamic from -20°C to 80°C, up to 100°C without halide.

Environment Condition : Zone1, Zone2 IIA-IIC Explosive gas atmosphere, Strict 21, 22 inflammable dust environment, it is widely used in petroleum, chemical, warehouse, food, pharmaceutical, military and other electrical cable fixing and sealing.

Technical Parameters

Product Model	Entry Thread Size (AG)		Cable Acceptance Details Outer Sheath ØB		H	GL	Hexagon Size	
	Metrix	NPT	Min	Max			Across Flats	Across Corners
SH-BDM-1-01	M16x1.5(M20)	1/2"	5.5	12.0	30.0	16	24.0	27.7
SH-BDM-1-01S	M20x1.5S	1/2"	9.5	16.0	38.0	16	24.0	27.7
SH-BDM-1-02	M25x1.5	3/4"	12.5	20.5	38.0	16	30.0	34.6
SH-BDM-1-03	M32x1.5	1"	16.9	26.0	44.0	18	36.0	41.6
SH-BDM-1-04	M40x1.5	1-1/4"	22.0	33.0	46.0	18	45.0	53.1
SH-BDM-1-05	M50x1.5	1-1/2"	28.0	41.0	50.0	20	55.0	63.5
SH-BDM-1-06	M63x1.5	2"	36.0	52.6	64.0	20	68.0	75.1
SH-BDM-1-07	M75x1.5	2-1/2"	46.0	65.3	70.0	20	80.0	92.4
SH-BDM-1-08	M85x1.5	3"	57.0	78.0	80.0	20	95.0	109.6

The thread length can be lengthened, according to the requirement of customer

Model Implication

SH - BDM - 1

Brand

Industrial Cable Gland
(Non-Armoured Cable)

02

Model

M



Thread
M, G, NPT

NB

Material

NB = Nickel Brass
B = Brass
SS304 = Stainless Steel 304
SS3016 = Stainless Steel 316

Example : SH-BDM-1-02MNB => Explosion Proof Cable Gland SH-BDM-1 (Non-Armored Cable),
Thread Type : Matrix, **Thread Size :** M25x1.5, **Material :** Nickel Brass

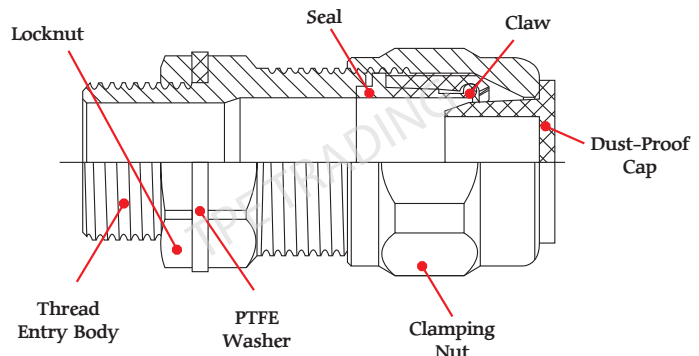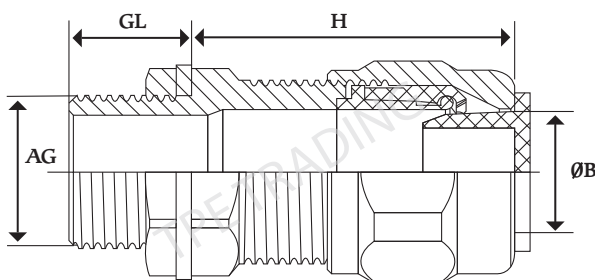

บริษัทฯ ขอสงวนสิทธิ์การเปลี่ยนแปลงราคา โดยมีต้นฉบับให้ทราบล่วงหน้า

ส่วนติดต่อค้าขาย Tel 02-027-7841, 095-543-5665 / Fax 02-026-6529

Email : sales.tpetrading@gmail.com / ID Line : @tpetrading