




Ex.Proof Convertor (Male - Female)

Material	Nickel Brass, SS 304/316 (On Request)	Sealing Materials	Neoprene
Surface Treatment	Nickel Planted, Passivation	Fireproof Grade	UL94V-0
Temperature	-20°C to 70°C (Static)	Protection Degree	IP66
Explosion Mark	Ex db IIC Gb/ Ex eb IIC Gb/ Ex tb IIIC Db		
• Suitable for hazardous environments such oil exploration, oil refining, chemical industry, military industry, ETC. • Suitable for Zone1 and Zone2 in explosive gas atmospheres. • Suitable for Area 20, 21 and 22 in combustible dust environments. • Suitable for IIA, IIB, IIC explosive gas environment.			

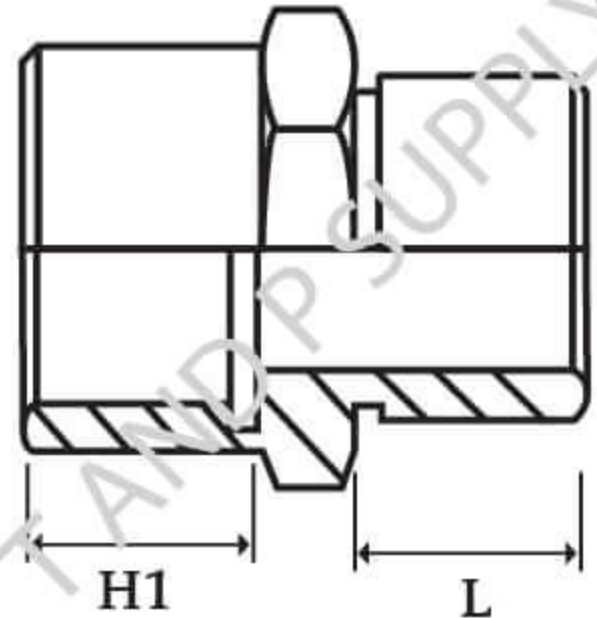

Product Model	Thread 1	Thread 2	H	L	Spanner Size
SH-SZJ-B M12x1.5-M16x1.5	M12x1.5	M16x1.5	16	19	24
SH-SZJ-B M16x1.5-M20x1.5	M16x1.5	M20x1.5	16	19	24
SH-SZJ-B M20x1.5-M25x1.5	M20x1.5	M25x1.5	16	19	30
SH-SZJ-B M20x1.5-M32x1.5	M20x1.5	M32x1.5	16	20	38
SH-SZJ-B M25x1.5-M32x1.5	M25x1.5	M32x1.5	16	20	38
SH-SZJ-B M25x1.5-M40x1.5	M25x1.5	M40x1.5	16	24	45
SH-SZJ-B M30x2.0-M32x1.5	M30x2.0	M32x1.5	18	20	38
SH-SZJ-B M30x2.0-M40x1.5	M30x2.0	M40x1.5	18	24	45
SH-SZJ-B M30x2.0-M50x1.5	M30x2.0	M50x1.5	18	25	55
SH-SZJ-B M32x1.5-M40x1.5	M32x1.5	M40x1.5	18	24	45
SH-SZJ-B M32x1.5-M50x1.5	M32x1.5	M50x1.5	18	25	55
SH-SZJ-B M36x2.0-M40x1.5	M36x2.0	M40x1.5	18	24	45
SH-SZJ-B M36x2.0-M50x1.5	M36x2.0	M50x1.5	18	25	55
SH-SZJ-B M40x1.5-M50x1.5	M40x1.5	M50x1.5	19	25	55
SH-SZJ-B M40x1.5-M63x1.5	M40x1.5	M63x1.5	19	31	68
SH-SZJ-B M48x2.0-M50x1.5	M48x2.0	M50x1.5	20	25	55
SH-SZJ-B M48x2.0-M63x1.5	M48x2.0	M63x1.5	20	31	68
SH-SZJ-B M50x1.5-M63x1.5	M50x1.5	M63x1.5	20	31	68
SH-SZJ-B M50x1.5-M75x1.5	M50x1.5	M75x1.5	20	33	86
SH-SZJ-B M56x2.0-M63x1.5	M56x2.0	M63x1.5	20	31	68
SH-SZJ-B M56x2.0-M75x1.5	M56x2.0	M75x1.5	20	33	86
SH-SZJ-B M63x1.5-M75x1.5	M63x1.5	M75x1.5	20	33	86
SH-SZJ-B M63x1.5-M80x1.5	M63x1.5	M80x1.5	20	33	90
SH-SZJ-B M63x1.5-M90x2.0	M63x1.5	M90x1.5	20	33	96
SH-SZJ-B M64x2.0-M63x1.5	M64x2.0	M63x1.5	20	31	68
SH-SZJ-B M64x2.0-M75x1.5	M64x2.0	M75x1.5	20	33	86
SH-SZJ-B M72x2.0-M75x1.5	M72x2.0	M75x1.5	22	33	86
SH-SZJ-B M72x2.0-M80x1.5	M72x2.0	M80x1.5	22	33	90
SH-SZJ-B M75x1.5-M80x1.5	M75x1.5	M80x1.5	22	33	96
SH-SZJ-B M75x1.5-M90x2.0	M75x1.5	M90x2.0	22	33	96
SH-SZJ-B M80x1.5-M90x2.0	M80x1.5	M90x2.0	22	33	96

SH - SZJ - B - - - NB

MALE-FEMALE TYPE THREAD 1 THREAD 2 MATERIAL

NB = Nickel Brass
 B = Brass
 SS304 = Stainless Steel 304
 SS316 = Stainless Steel 316

****บริษัทฯ ขอสงวนสิทธิ์การเปลี่ยนแปลงราคา โดยมีต้องแจ้งให้ทราบล่วงหน้า****

ส่วนติดต่อฝ่ายขาย Tel 066-168-2871 Email : sales.tandp@gmail.com / ID Line : @tandp

Ex.Proof Convertor (Male - Female)

Material	Nickel Brass, SS 304/316 (On Request)	Sealing Materials	Neoprene
Surface Treatment	Nickel Planted, Passivation	Fireproof Grade	UL94V-0
Temperature	-20°C to 70°C (Static)	Protection Degree	IP66
Explosion Mark	Ex db IIC Gb/ Ex eb IIC Gb/ Ex tb IIIC Db		

- Suitable for hazardous environments such oil exploration, oil refining, chemical industry, military industry, ETC.
- Suitable for Zone1 and Zone2 in explosive gas atmospheres.
- Suitable for Area 20, 21 and 22 in combustible dust environments.
- Suitable for IIA, IIB, IIC explosive gas environment.

TEMP


-20°C
TO
70°C

APPROVAL

UL
94V-0

EX
Proof

IP66

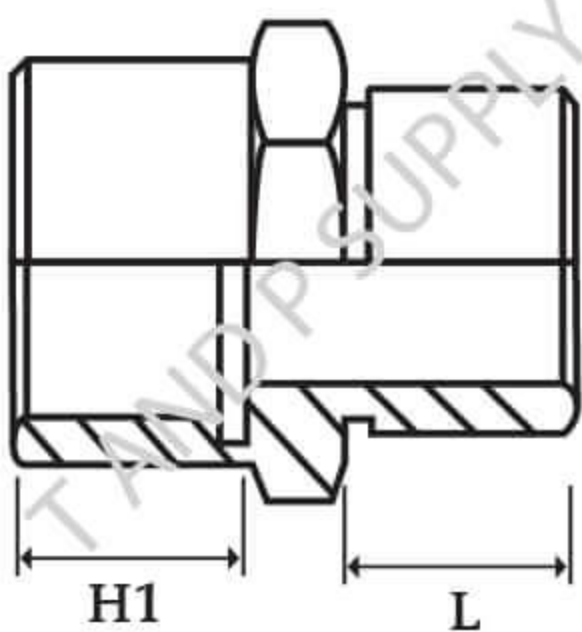

Product Model	Thread 1	Thread 2	H	L	Spanner Size
SH-SZJ-B M80x1.5-M100x2.0	M80x1.5	M100x2.0	22	33	112
SH-SZJ-B M90x2.0-M100x2.0	M90x2.0	M100x2.0	22	33	112
SH-SZJ-B NPT1/4-NPT3/8	NPT1/4	NPT3/8	16	19	24
SH-SZJ-B NPT3/8-NPT1/2	NPT3/8	NPT1/2	16	19	24
SH-SZJ-B NPT1/2-NPT3/4	NPT1/2	NPT3/4	16	19	30
SH-SZJ-B NPT1/2-NPT1	NPT1/2	NPT1	16	20	38
SH-SZJ-B NPT3/4-NPT1	NPT3/4	NPT1	16	20	38
SH-SZJ-B NPT3/4-NPT1-1/4	NPT3/4	NPT1-1/4	16	24	45
SH-SZJ-B NPT1-NPT1-1/4	NPT1	NPT1-1/4	18	24	45
SH-SZJ-B NPT1-NPT1-1/2	NPT1	NPT1-1/2	16	25	55
SH-SZJ-B NPT1-1/4-NPT1-1/2	NPT1-1/4	NPT1-1/2	19	25	55
SH-SZJ-B NPT1-1/4-NPT2	NPT1-1/4	NPT2	19	31	68
SH-SZJ-B NPT1-1/2-NPT2	NPT1-1/2	NPT2	20	31	68
SH-SZJ-B NPT1-1/2-NPT2-1/2	NPT1-1/2	NPT2-1/2	20	33	86
SH-SZJ-B NPT2-NPT2-1/2	NPT2	NPT2-1/2	20	33	86
SH-SZJ-B NPT2-NPT3	NPT2	NPT3	20	33	96
SH-SZJ-B NPT2-NPT3-1/2	NPT2	NPT3-1/2	20	35	112
SH-SZJ-B NPT2-1/2-NPT3	NPT2-1/2	NPT3	28	33	96
SH-SZJ-B NPT2-1/2-NPT3-1/2	NPT2-1/2	NPT3-1/2	28	35	112
SH-SZJ-B NPT3-NPT3-1/2	NPT3	NPT3-1/2	28	35	112
SH-SZJ-B NPT3-NPT4	NPT3	NPT4	28	35	126
SH-SZJ-B NPT3-1/2-NPT4	NPT3-1/2	NPT4	28	35	126
SH-SZJ-B G1/4-G3/8	G1/4	G3/8	16	19	24
SH-SZJ-B G3/8-G1/2	G3/8	G1/2	16	19	27
SH-SZJ-B G1/2-G3/4	G1/2	G3/4	16	19	30
SH-SZJ-B G1/2-G1	G1/2	G1	16	20	36
SH-SZJ-B G3/4-G1	G3/4	G1	16	20	36
SH-SZJ-B G3/4-G1-1/4	G3/4	G1-1/4	16	24	45
SH-SZJ-B G1-G1-1/4	G1	G1-1/4	18	24	45
SH-SZJ-B G1-G1-1/2	G1	G1-1/2	18	25	55
SH-SZJ-B G1-1/4-G1-1/2	G1-1/4	G1-1/2	19	25	55

SH - SZJ - B -

MALE-FEMALE TYPE

 -

THREAD 1

 -


THREAD 2

 -

NB

 - MATERIAL

NB = Nickel Brass
B = Brass
SS304 = Stainless Steel 304
SS316 = Stainless Steel 316

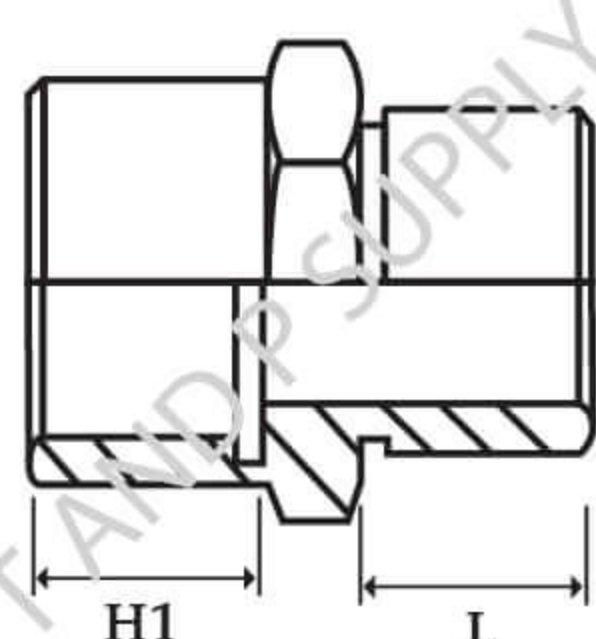

Ex.Proof Convertor (Male - Female)

Material	Nickel Brass, SS 304/316 (On Request)	Sealing Materials	Neoprene
Surface Treatment	Nickel Planted, Passivation	Fireproof Grade	UL94V-0
Temperature	-20°C to 70°C (Static)	Protection Degree	IP66
Explosion Mark	Ex db IIC Gb/ Ex eb IIC Gb/ Ex tb IIIC Db		

- Suitable for hazardous environments such as oil exploration, oil refining, chemical industry, military industry, ETC.
- Suitable for Zone1 and Zone2 in explosive gas atmospheres.
- Suitable for Area 20, 21 and 22 in combustible dust environments.
- Suitable for IIA, IIB, IIC explosive gas environment.



Product Model	Thread 1	Thread 2	H	L	Spanner Size
SH-SZJ-B G1-1/4-G2	G1-1/4	G2	19	31	68
SH-SZJ-B G1-1/2-G2	G1-1/2	G2	20	31	68
SH-SZJ-B G1-1/2-G2-1/2	G1-1/2	G2-1/2	20	33	86
SH-SZJ-B G2-G2-1/2	G2	G2-1/2	20	33	86
SH-SZJ-B G2-G3	G2	G3	20	33	96
SH-SZJ-B G2-G3-1/2	G2	G3-1/2	20	35	112
SH-SZJ-B G2-1/2-G3	G2-1/2	G3	22	33	96
SH-SZJ-B G2-1/2-G3-1/2	G2-1/2	G3-1/2	22	35	112
SH-SZJ-B G3-G3-1/2	G3	G3-1/2	22	35	112
SH-SZJ-B G3-G4	G3	G4	22	35	126
SH-SZJ-B G3-1/2-G4	G3-1/2	G4	22	35	126

SH - **SZJ** - **B** - - - NB

MALE-FEMALE TYPE THREAD 1 THREAD 2 MATERIAL

NB = Nickel Brass
 B = Brass
 SS304 = Stainless Steel 304
 SS316 = Stainless Steel 316