

HSS STRAIGHT SHANK TWIST DRILL

ดอกสว่านก้านตรง รุ่นมาตรฐาน DIN338

Finish endmill for milling
on steel, non-ferrous and cast iron

156

APPLICATION

HSE
PM M3

Blk

123


h8

- Suitable for all drilling applications with longer tool life
- High hardness and excellent wear resistance.
- Stronger core diameter and good impact resistance



กลุ่มวัสดุ ISO

- ✓ Carbon Steel Alloy Steel.
- ✓ Cast Iron
- ✓ Aluminium
- ✓ Stainless Steel
- ✗ HardenSteel (<HRC35)
- ✗ Titanium (etc.)

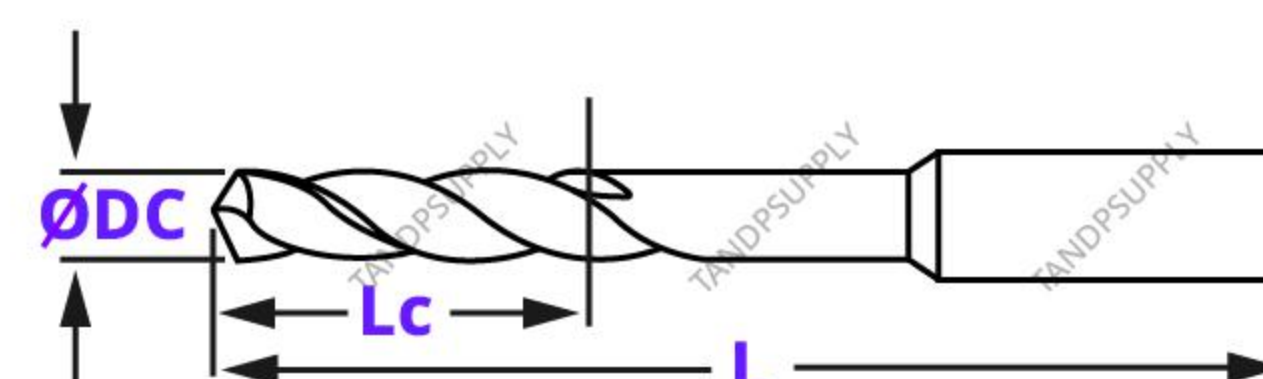

Product Code	Diameter (mm.)	Lc (mm.) คมตัด	L (mm.) ความยาว ทั้งตัว
1560100A	1.00	12.0	34
1560110A	1.10	14.0	36
1560120A	1.20	16.0	38
1560130A	1.30	16.0	38.2
1560140A	1.40	18.0	40
1560150A	1.50	18.0	40
1560160A	1.60	20.0	43
1560170A	1.70	20.0	43
1560180A	1.80	22.0	46
1560190A	1.90	22.0	46
1560200A	2.00	24.0	49
1560210A	2.10	24.0	49
1560220A	2.20	27.0	53
1560230A	2.30	27.0	53
1560240A	2.40	30.0	57
1560250A	2.50	30.0	57
1560260A	2.60	30.0	57
1560270A	2.70	33.0	61
1560280A	2.80	33.0	61
1560290A	2.90	33.0	61
1560300A	3.00	32.0	61
1560310A	3.10	35.0	65
1560320A	3.20	35.0	65
1560330A	3.30	35.0	65
1560340A	3.40	38.0	70
1560350A	3.50	38.0	70
1560360A	3.60	38.0	70
1560370A	3.70	38.0	70
1560380A	3.80	42.0	75
1560390A	3.90	42.0	75
1560400A	4.00	42.0	75
1560410A	4.10	42.0	75
1560420A	4.20	42.0	75
1560430A	4.30	46.0	80
1560440A	4.40	46.0	80
1560450A	4.50	46.0	80
1560460A	4.60	46.0	80
1560470A	4.70	46.0	80
1560480A	4.80	51.0	86
1560490A	4.90	51.0	86

Product Code	Diameter (mm.)	Lc (mm.) คมตัด	L (mm.) ความยาว ทั้งตัว
1560500A	5.00	51	86
1560510A	5.10	51	86
1560520A	5.20	51	86
1560530A	5.30	51	86
1560540A	5.40	59	93
1560550A	5.50	59	93
1560560A	5.60	59	93
1560570A	5.70	59	93
1560580A	5.80	59	93
1560590A	5.90	59	93
1560600A	6.00	59	93
1560610A	6.10	62	101
1560620A	6.20	62	101
1560630A	6.30	62	101
1560640A	6.40	62	101
1560650A	6.50	62	101
1560660A	6.60	62	101
1560670A	6.70	62	101
1560680A	6.80	68	109
1560690A	6.90	68	109
1560700A	7.00	68	109
1560710A	7.10	68	109
1560720A	7.20	68	109
1560730A	7.30	68	109
1560740A	7.40	68	109
1560750A	7.50	68	109
1560760A	7.60	74	117
1560770A	7.70	74	117
1560780A	7.80	74	117
1560790A	7.90	74	117
1560800A	8.00	74	117
1560810A	8.10	74	117
1560820A	8.20	74	117
1560830A	8.30	74	117
1560840A	8.40	74	117
1560850A	8.50	74	117
1560860A	8.60	80	125
1560870A	8.70	80	125
1560880A	8.80	80	125
1560890A	8.90	80	125

****บริษัทฯ ขอสงวนสิทธิ์การเปลี่ยนแปลงราคา โดยมีต้องแจ้งให้ทราบล่วงหน้า****


ส่วนติดต่อฝ่ายขาย Tel 066-168-2871 Email : sales.tandp@gmail.com / ID Line : @tandp

HSS STRAIGHT SHANK TWIST DRILL
ดอกสว่านก้านตรง รุ่นมาตรฐาน DIN338



กลุ่มวัสดุ ISO

- ☒ Carbon Steel Alloy Steel.
- ☒ Cast Iron
- ☒ Aluminium
- ☒ Stainless Steel
- ☒ HardenSteel (<HRC35)
- ☒ Titanium (etc.)

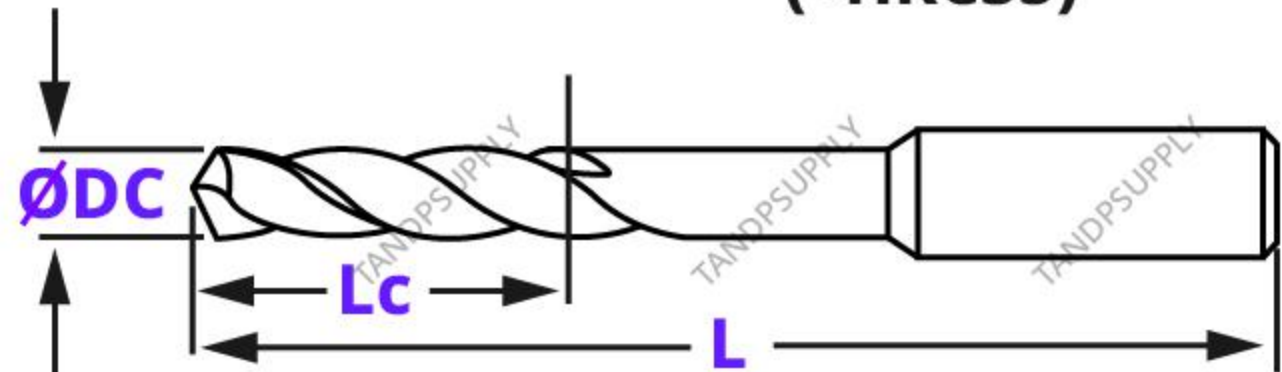

156
APPLICATION

- HSE
PM
- Blk
- 123
- h8
- DIN
338

- Suitable for all drilling applications with longer tool life
- High hardness and excellent wear resistance.
- Stronger core diameter and good impact resistance

Product Code	Diameter (mm.)	Lc (mm.) คมตัด	L (mm.) ความยาว ทั้งตัว
1560900A	9.00	80	125
1560910A	9.10	80	125
1560920A	9.20	80	125
1560930A	9.30	80	125
1560940A	9.40	80	125
1560950A	9.50	80	125
1560960A	9.60	86	133
1560970A	9.70	86	133
1560980A	9.80	86	133
1560990A	9.90	86	133
1561000A	10.00	86	133
1561010A	10.10	86	133
1561020A	10.20	86	133
1561030A	10.30	86	133
1561040A	10.40	86	133
1561050A	10.50	86	133
1561060A	10.60	86	133
1561070A	10.70	93	142
1561080A	10.80	93	142
1561090A	10.90	93	142
1561100A	11.00	93	142

Product Code	Diameter (mm.)	Lc (mm.) คมตัด	L (mm.) ความยาว ทั้งตัว
1561110A	11.10	93	142
1561120A	11.20	93	142
1561130A	11.30	93	142
1561140A	11.40	93	142
1561150A	11.50	93	142
1561160A	11.60	93	142
1561170A	11.70	93	142
1561180A	11.80	93	142
1561190A	11.90	100	151
1561200A	12.00	100	151
1561210A	12.10	100	151
1561220A	12.20	100	151
1561230A	12.30	100	151
1561240A	12.40	100	151
1561250A	12.50	100	151
1561260A	12.60	100	151
1561270A	12.70	100	151
1561280A	12.80	100	151
1561290A	12.90	100	151
1561300A	13.00	100	151